


Project:	
Type:	
Catalog #:	



STANDARD

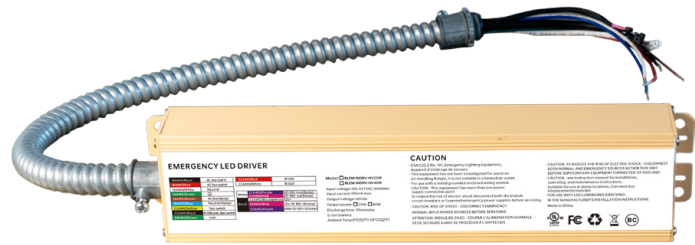

ILLUMINATION

- Provides voltage to the Input side of the connected load! during emergency mode operation.
- For use with switched or unswitched fixtures.
- Can be used with LED lamp/luminaire loads providing up to 25W and 40W of constant power in emergency mode.
- Optional remote available for manual testing

ELECTRICAL

- Universal 120-347V, 50-60 Hz input.
- 145VDC, 6A Max. Output
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance free, rechargeable Lithium battery.
- With multi-protection function: overcharge; over-discharge; output! overload; short-circuit and open load protection.
- 90 Minute minimum emergency operating time over full! temperature range.
- 24 Hour maximum battery recharge time.
- Monthly/Annual Self-testing

HOUSING

- Durable painted Stamped Aluminum construction
- Provided with 2' flex conduit


MOUNTING

- Suitable for inside or top mount of LED fixtures.

WARRANTY/LISTING

- UL Listed for factory or field installation.
- Suitable for damp locations (0°C - 50°C).
- 5 year warranty on all electronics and housing.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State codes.
- Complies with FCC part 15, class B.
- Certified to CEC under Title 20 regulations.

DIMENSIONS

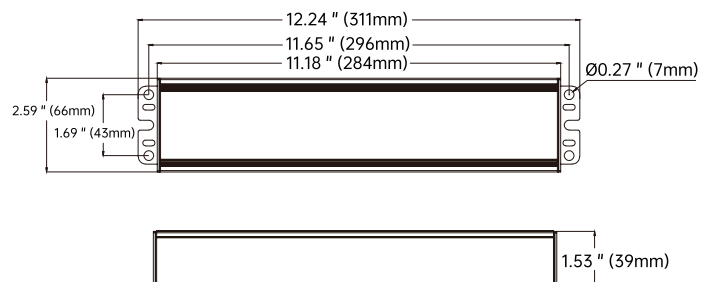

Model #	L (in)	W (in)	H (in)	Weight (lbs)
BLEM-INDRV-HV	12.24	2.59	1.53	3.2

ORDERING INFORMATION

MODEL	OUTPUT POWER	
BLEM-INDRV	HV25	25 watts
	HV40	40 watts

Sample Part Number: **BLEM-INDRV-HV25**