# CEMXTE Remote Capable Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	

STANDARD

**OPTIONAL** 













# ILLUMINATION

 Ultra-bright, energy efficient, long-life Red or Green LED EXIT sign illumination.

### **ELECTRICAL**

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-totest switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- 5.5W of remote capacity standard.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

#### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Snap-out Chevron directional indicators.




#### OPTIONS

 SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage

#### **WARRANTY / LISTING**

- Five-year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).
- Certified to CEC under Title 20 Regulations.

#### **DIMENSIONS**

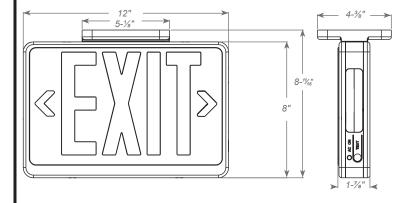

#### ORDERING INFORMATION

MODEL	MODEL No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS	
CEMXTE	Universal Single/	R	Red	W	White	SDT	Self-Diagnostics	
Dou	Double Face	G	Green	В	Black	IISA	Assembled in USA	

Sample Part Number: CEMXTERW

# CEMXTE Remote Capable Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
CEMXTE RED/GREEN	1.2	1.2	0.12	0.11
CEMXTE RED SDT	3.0	3.0	0.36	0.36
CEMXTE GREEN SDT	3.0	3.0	0.34	0.34

# REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY		COMPATIBLE REMOTE HEAD FAMILY				
		CAPACITY	RHLED	MRHLED	RH16LED	SRHLED	
CEMXTE	3.6V	5.5W	Х	х			