

FPR Series

Flat Panel
Kelvin Field Selectable

BEST
LIGHTING PRODUCTS

Project:	
Type:	
Catalog #:	

STANDARDS



HOUSING

- Premium powder-coat, aluminum, white housing.

ELECTRICAL

- Operating temperature (ambient): -20°C to 45°C (-4°F to 113°F).
- Universal 120V AC voltage (60Hz) is standard.
- Triac dimming.
- Input transient surge protection = 0.5kV.
- Type IC.
- Power factor > 0.90.
- Total Harmonic distortion < 20%.

OPTICAL SYSTEM

- Polystyrene lens.
- Field selectable 2700k(soft white), 3000k(warm white), 3500k(warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures*.
- Provide a range delivers 400 to 1400 nominal lumens*.
- Long-life LEDs provide 139,000 hours of operation with at least 70% of initial lumen output (L70)**.
- Beam angle 110°.
- Color rendering index > 90.

* Default 4000K color temperature and highest lumen output.

**FPR4 and FPR6 L70=71,000 hours. L70 hours are IES TM-21-11 calculated hours.



MOUNTING


- Recessed ceiling, new construction or retrofit.
- No recessed housing required for installation.
- Access above ceiling required.
- Covered ceiling mount only.

CODE COMPLIANCE

- cETLus listed for wet locations.
- Complies with FCC part 15, class B.

WARRANTY

- 5 year warranty on all electronics and housing.

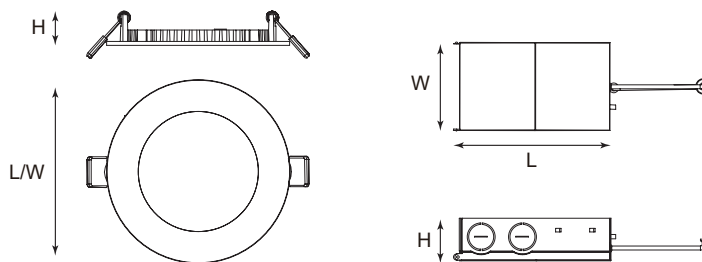

Model #	L (in)	W (in)	H (in)	Weight (lbs)	Junction Box Size (LxWxH inch)
FPR3-4L-KFS	3.62	3.62	0.85	0.44	3.94 x 2.68 x 1.4
FPR4-6L-KFS	4.74	4.74	0.79	0.63	4.73 x 2.77 x 1.34
FPR6-10L-KFS	6.73	6.73	0.79	0.88	4.73 x 2.77 x 1.34
FPR8-14L-KFS	8.82	8.82	0.93	1.10	4.73 x 2.77 x 1.34

ORDERING INFORMATION

Example: FPR3-4L-KFS

Series	Nominal Lumen Output		Kelvin Selectable
FPR3	4L	400 lm	KFS 2700/ 3000/ 3500/ 4000/ 5000K
FPR4	6L	600 lm	
FPR6	10L	1000 lm	
FPR8	14L	1,400 lm	

BEST LIGHTING PRODUCTS • 1213 ETNA PARKWAY, PATASKALA OH 43062 • 740-964-1198 • www.bestlighting.net

Specifications and dimensions subject to change without notice.

August 1, 2024 8:18 AM

ACCESSORIES (ORDER SEPARATELY)

Mounting Option:

MP-UD346-NC* = Mounting plate for 3", 4", and 6" canless recessed downlights


* Not compatible with FPR8-14L-KFS.

COMPATIBLE DIMMERS AND CONTROLS


Manufacturer	Model Number		
Lutron	TG-600PR-WH	SLV-600P-AL	DVCL-153P
	S-600PR-WH	DV-600PR-WH	MSCL-OP153M
	CTCL-153PDH-WH	SCL-153PH-WH	PD-6WCL
	TGCL-153PH-LA	GT-600P	MACL-153M//MA-R
Leviton	6672	6674	IPL06
	RNL06	DSL06	-

DIMENSIONAL DRAWINGS


FPR3-4L-KFS

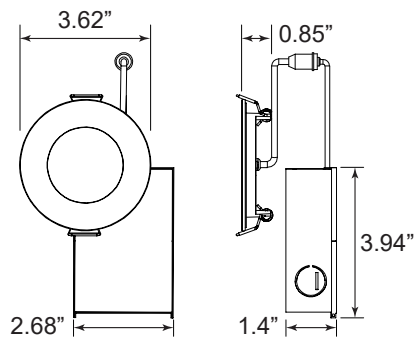

FPR4-6L-KFS

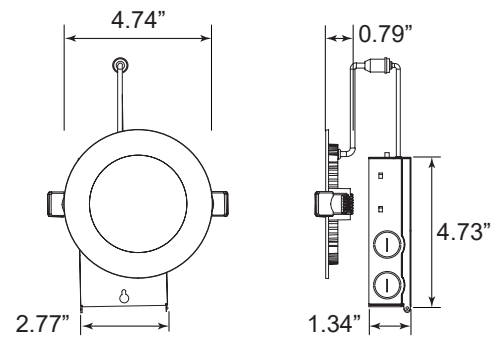

FPR6-10L-KFS

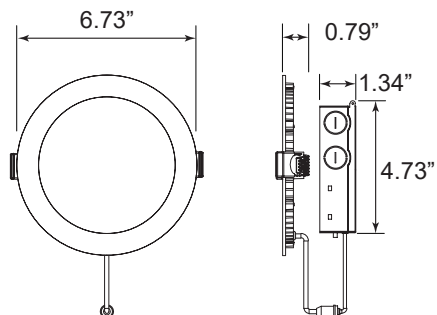

FPR8-14L-KFS

