


INDRHLED16 LED NEMA4X/NSF REMOTE HEAD



Project:	
Type:	
Catalog #:	

STANDARD



OPTIONAL



ILLUMINATION

- Two fully adjustable, ultra bright 3.6 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

ELECTRICAL

- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING

- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockouts provided for conduit feed applications.


OPTIONS

- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

WARRANTY / LISTING

- Five year warranty.
- UL listed with approved Best Lighting Products.
- IP66 rated for Ingress protection.
- NEMA4X rated.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL certified for use in food service operations.

DIMENSIONS

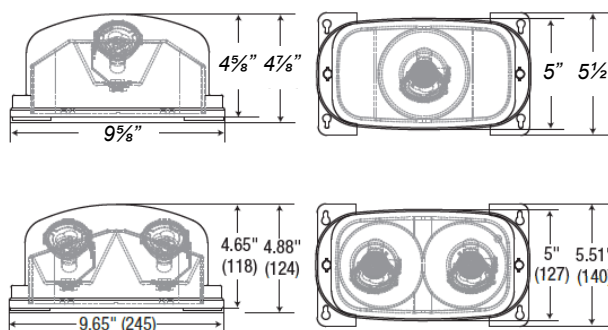

FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

BEST LIGHTING MODEL TYPE			
CADXR	CALEDXTE	CAR	CWLEZXTE-RC
DXR	LEDSDXR	LEDTFX-2	NYDXR
RMR-16-65/125	CEMXTE	INDEMR	HLEMR
INDCWLEZ	HLCWLEZ	CAEM	

ORDERING INFORMATION

Sample Part Number: INDRHLED16-1B

MODEL	HEADS	HOUSING COLOR	OPTIONS
INDRHLED16	1 2	Single Twin	W B White Black
			TP Tamper-Proof