

# RMLEDCXTEU Running Man All LED Exit Sign & Emergency Combo

**BEST**  
LIGHTING PRODUCTS

Project:	
Type:	
Catalog #:	



## STANDARD



## OPTIONAL

## ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Ultra bright, energy efficient, long-lasting white LED provides even, fully illuminated panel.

## ELECTRICAL

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Left, Right and No Arrow) pictogram legends.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.


## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- RC: Remote capacity of 3.0 watts.
- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C – 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for Emergency lighting equipment.

## DIMENSIONS

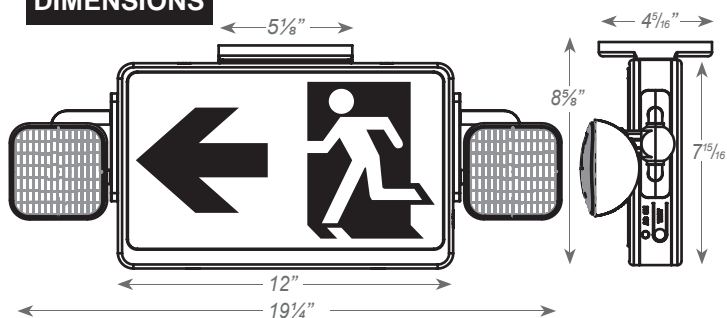

## ORDERING INFORMATION

Sample Part Number: **RMLEDCXTEU2W**

MODEL	No. of FACES	HOUSING COLOR	OPTIONS
RMLEDCXTEU	2	W White B Black	SDT Self-diagnostics RC Remote Capacity HL High Lumen

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	347V	120V	347V
RMLEDXTE	4.4	4.4	0.035	0.013

## REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
RMLEDXTEU-RC	9.6V	3W-4W		X	X	X									